


Bellus Technical Data

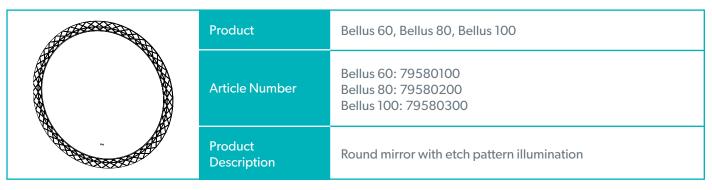

Technical Data	
Net weight (kg)	Bellus 60: 6.38kg Bellus 80: 10.2kg Bellus 100: 11.7kg
Light Source	LED
Light Source Average Lifespan	30,000hrs - 50,000hrs
Total Rated Wattage (W)	Bellus 60: 30W / Bellus 80: 50W / Bellus 100: 75W
Lumens (Lm)	Bellus 60: 1365lm / Bellus 80: 2047.5lm / Bellus 100: 6000lm
Kelvins (k)	2700 - 6500k
Is the mirror dimmable?	No
Energy Rating	Bellus 60 & 80: E / Bellus 100: F
Does the mirror require an earth connection?	No
Can I bypass the sensor so the mirror comes on with the main room light?	No
Colour temperature change (CTC) technology?	Yes
What IP rating is the mirror?	IP44 rated
What orientation can the mirror be hung in?	N/A
Is the heated pad only on when the mirror is illuminated?	Yes
How long is the warranty?	5 years from date of purchase on silvering coating on mirror 2 years from date of purchase on electrical components in the mirror

Electrical Safety Information

HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician in accordance with current IEE regulations.

Ensure mains power supply is switched off before starting installation.

Before drilling, ensure there are no hidden cables or pipes in the wall.

HiB recommend you receive the product before commencing with installation as all sizes and measurements are approximate. HiB try and ensure all measurements are as accurate as possible.

In the interest of continuous product development, HiB reserves the right to alter specification as necessary. E & OE.