










PANACEA 4P2003 - TALL MONO BASIN

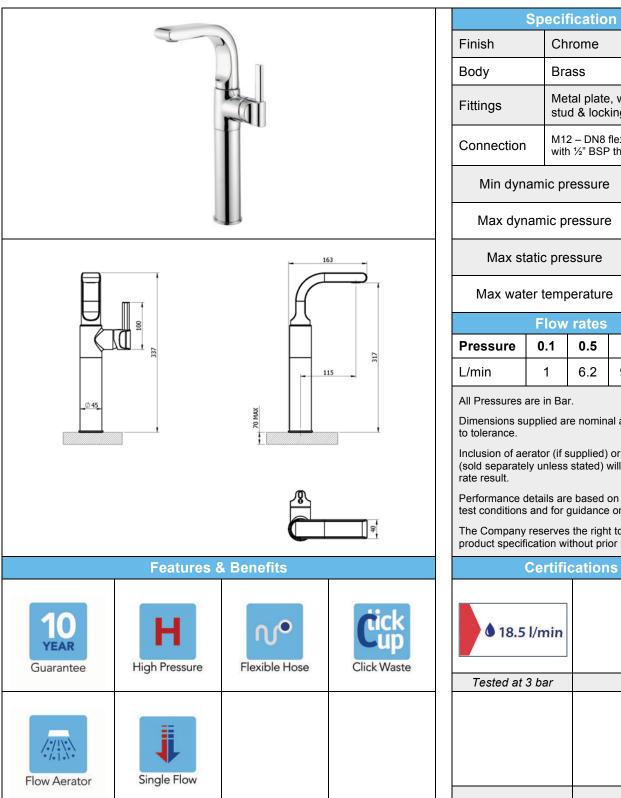

Specification						
Finish	Ch	Chrome				
Body	Bra	Brass				
Fittings		Metal plate, washer, stud & locking nut				
Connection		M12 – DN8 flexible hoses with ½" BSP threaded ends				
Min dynamic pressure					0.4	
Max dynamic pressure					6	
Max static pressure					16	
Max water temperature					60°C	
Flow rates						
Pressure	0.1	0.5	1		3	
L/min	1	6.2	9.8		18.5	

All Pressures are in Bar.

Dimensions supplied are nominal and subject

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

18.5 l/min	
Tested at 3 bar	

COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

