



TECHNICAL DATA SHEET

SENSA Wall Mounted Sensor Tap

Barcode	7081244780333
Product Code	UT04
Construction	Brass & stainless steel
Finishes	Chrome plated to BS EN 248
Product Type	Commercial
Aerator	Anti splash & flow restrictor
Water Pressure	Min. 0.5 bar, Max. 6.0 bar
Plumbing Systems	Suitable for all plumbing systems
Standards	Complies with EN60529
Certification	CE , ROHS , IP44
Power	Voltage: DC6V or AC220V-240V (6V Output) Power consumption: =0.3mW
Power Options	Choice of : i. Batteries only DC (4 x AA batteries) ii. Mains power AC supply only iii. Both Mains AC + Batteries DC (backup) connected at the same time
Silent Consumption	0.003mW
Fitting	Control box: Diameter of 'inlet' pipe: G1/2" Control box: Diameter of 'outlet' pipe: G1/2" Suitable for cold or premixed water
Sensing distance	6 - 30 cm
Respond time	1 Second
Noise Class	1
Packaging	55x38x33.5cm/carton(10pcs), Bx size: 33x18.5x11cm, Weight: 2.1kg
Additional Information	i. Vandal and scratch resistant sensor window ii. Suitable for battery installation, and for cold or premixed water. iii. Maximum operational temperature 45°C. iv. Aerator: Air Aerator

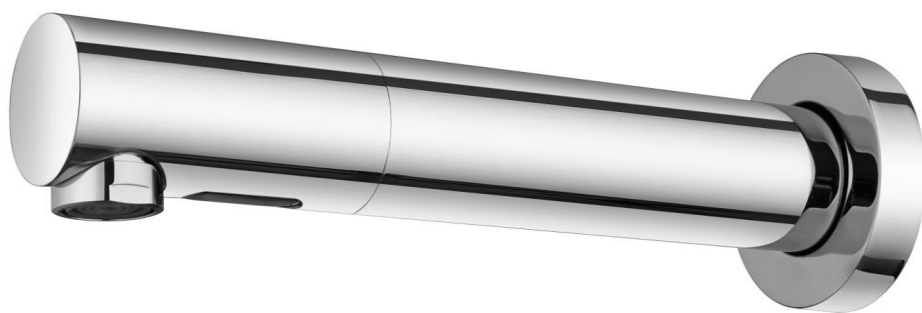

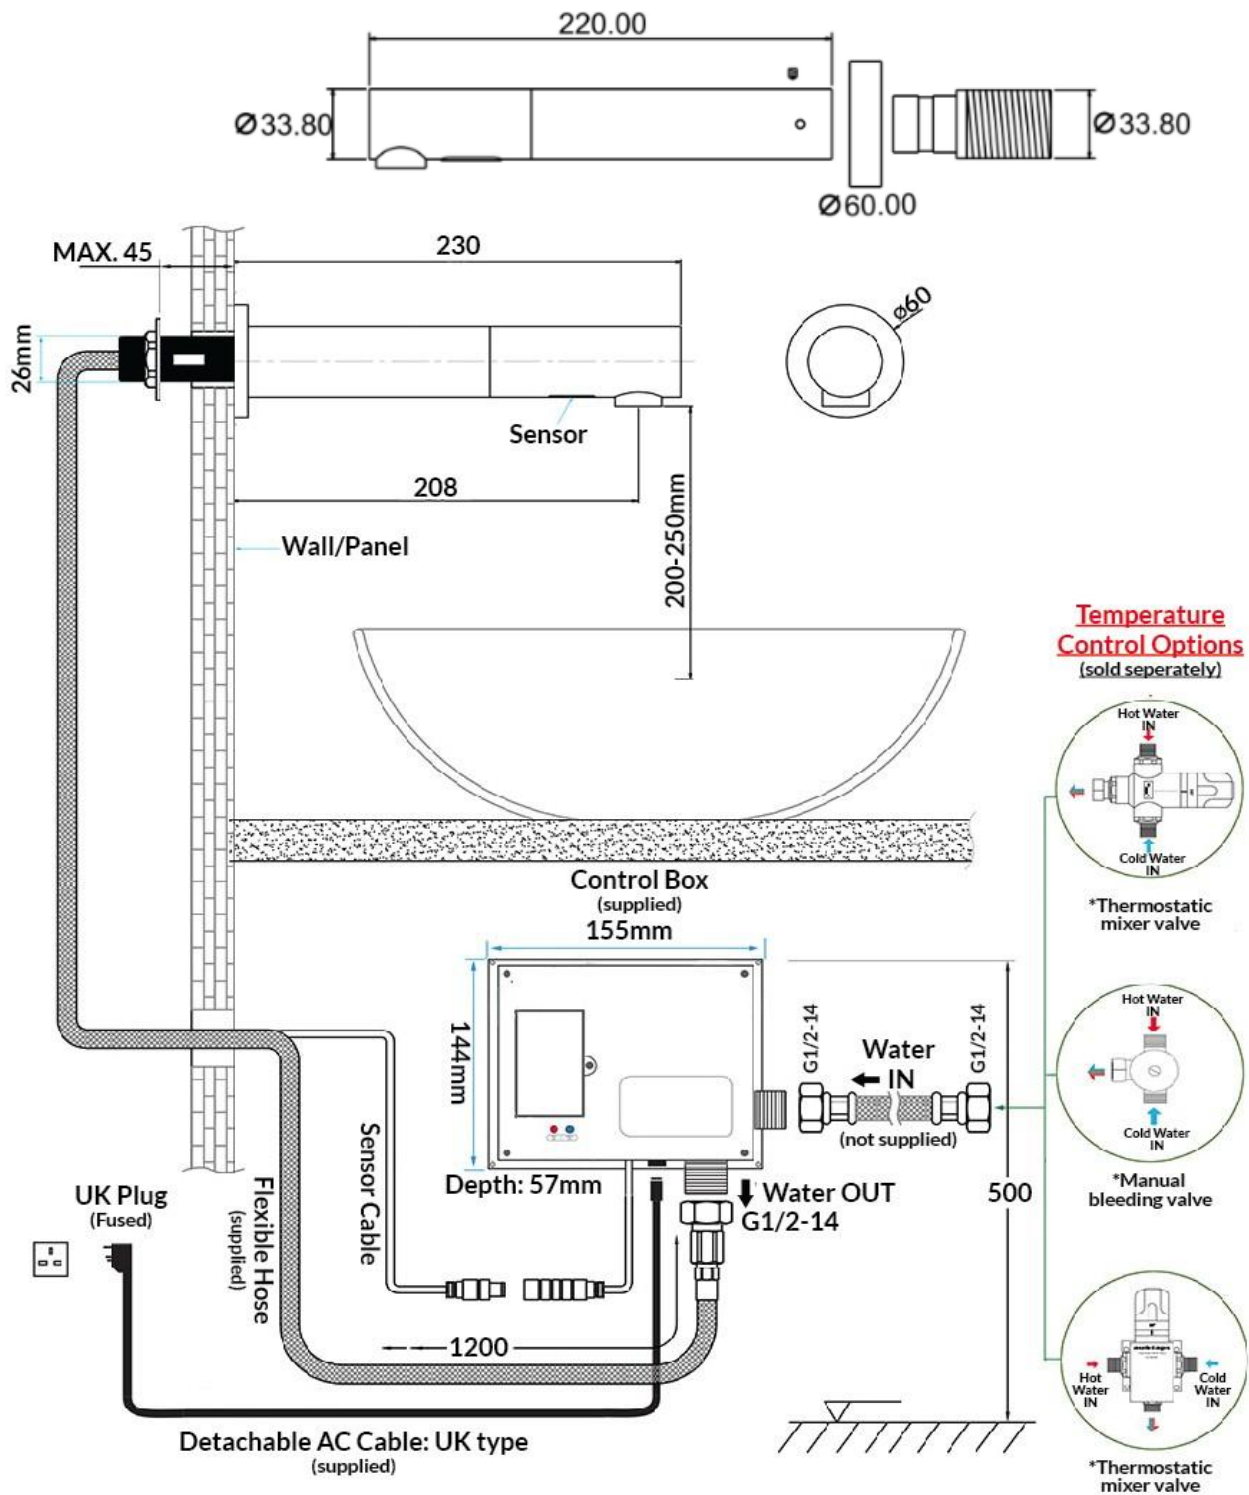

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
SENSA	-	2.37	-	8.35	11.95	-	18.35	27.00	-	-

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.