
Hinge Door ASSEMBLY GUIDE

IMPORTANT


1.. The cubicle can be constructed either way up, for left or right hand opening.

2.. These instruction and list of parts assume that installation is done against solid or tiled walls. Hollow or "Stud - partition" walls will require alternatie fixings. Please consult a hardware supplier for the correct type. It may also be necessary to consult your tiling supplier about the correct method for drilling your tiles.
3.. Please check this product for damage prior to starting the installation. No claims can be made after the products has been fitted, or after fitting has commenced.

- **4..** This is a 2 person installation.
- 5.. Please note the minimum and maximum adjustment for this product are based on perfectly plumb walls.

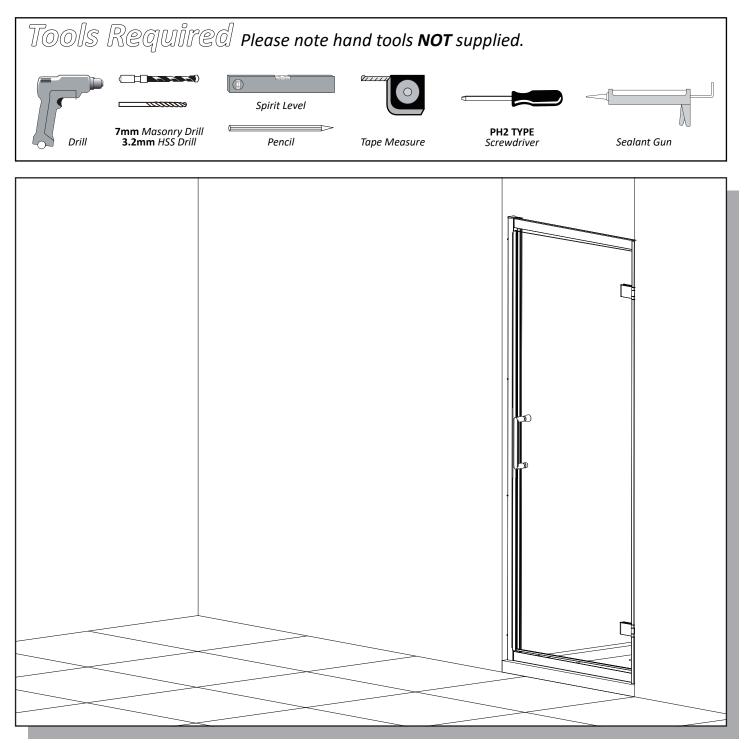

Hinge Door EXPOLDED VIEW AND PARTS LIST

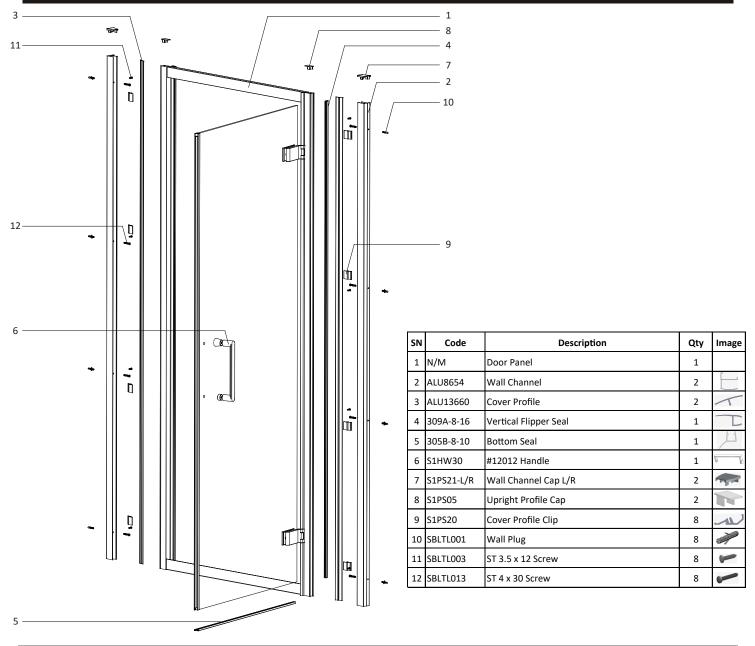

Silicone M TRAY


TRAY MUST BE SEALED FULLY AROUND WHERE THE TRAY MEETS THE WALL TRAY MUST BE 100% LEVEL IN ALL DIRECTIONS

TRAY MUST BE 100% LEVEL IN ALL DIRECTIONS TRAY MUST BE SEALED FULLY AROUND WHERE THE TRAY MEETS THE WALL

Ensure the shower tray is level in all directions and is properly sealed to the wall. The wall must be tiled down to the top edge of the tray. **Do not angle out bottom tile.**



It is good plumbing practice and common sense to not install a shower head pointing at the opening of any shower enclsure.

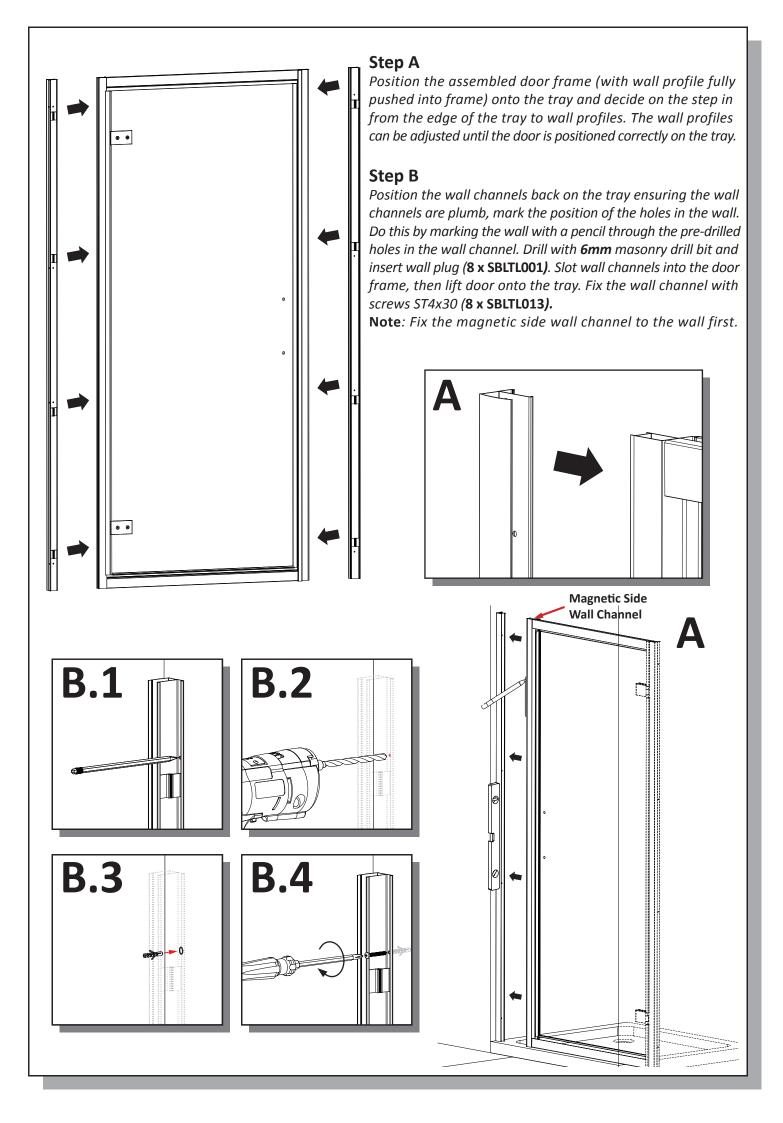



Step C

Drill 3 equally spaced holes with **3mm** drill bit through the wall profile and frame. Fix the frame to the wall profile with ST3.5 x 12 screws (**8 x SBLTL003**). Put the Cover Profiles (**2 x ALU13660**) on the plastic clip (**8 x S1PS20**).

Step D


Attach the Vertical flipper seal **309A-8-16** to the hinged side of the glass panel. Attach the Bottom seal **305B-8-10** to the bottom of the panel.

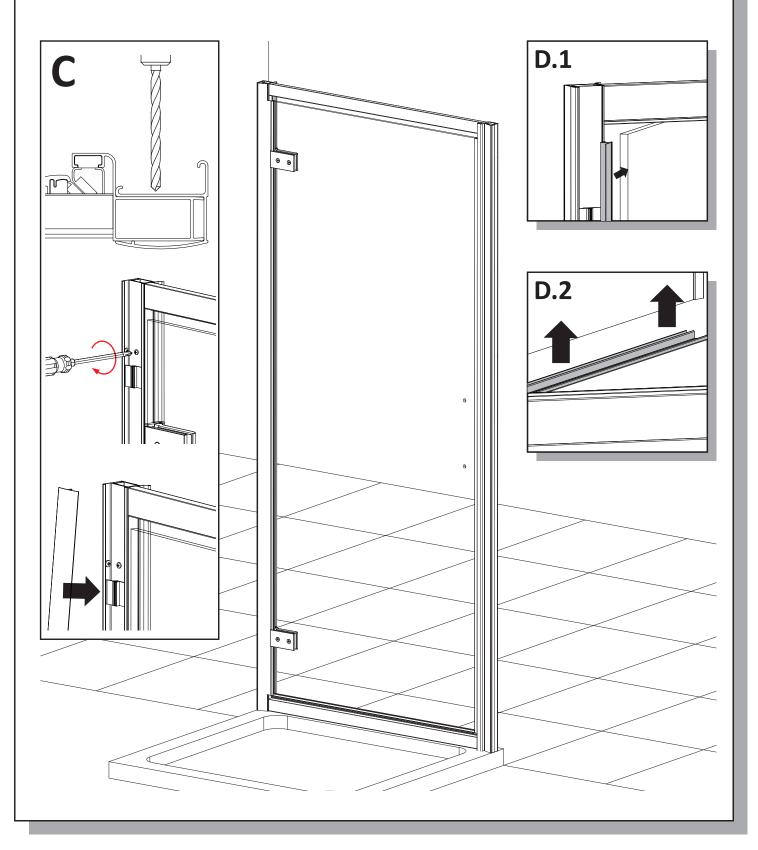




Step E

Put the upright profile caps **S1PS05** and wall channel caps **S1PS21L/R** on.

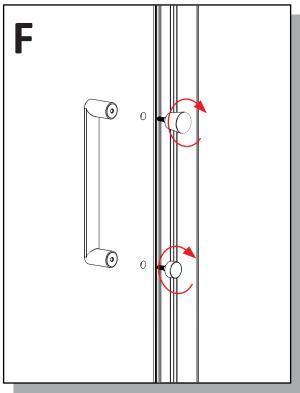

Step F

Assemble the handle (S1HW30) on the glass panel.

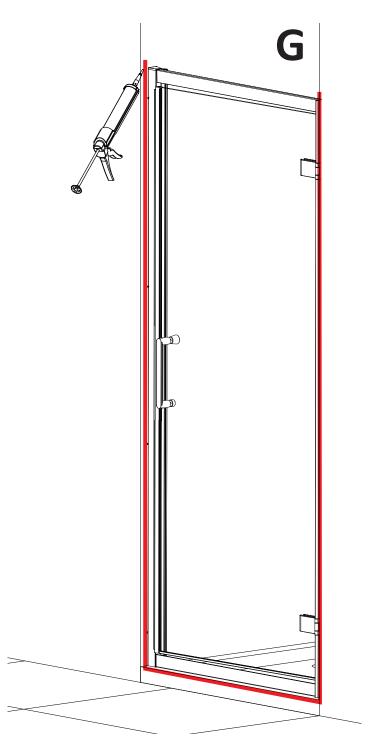






DO NOT USE THE ENCLOSURE FOR 24 HOURS AFTER SEALING





Step G

Applying Silicone Sealant And Cleaning

Seal from the top of the wall channel to the bottom on the **INSIDE** and **Outside** between the wall channel and the wall, and between the bottom profile and shower tray as shown. Wash down with clean warm water and a soft clean cloth or sponge. Please do not use bleach, alkaline or acid-based, aggressive or abrasive cleaning products.